



MODULAR LED FLOODLIGHT

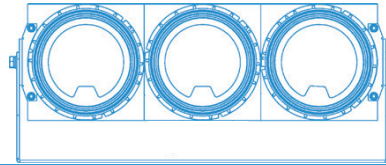

MFL 3 SERIES

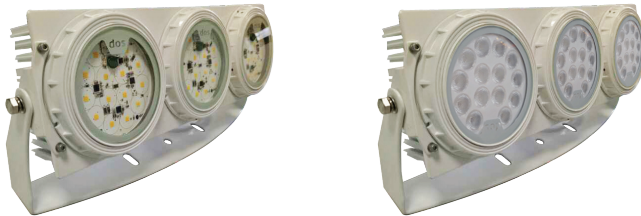

Key Features

- Triac dimming compatible (**220V-240VAC & 100V-120VAC only**)
- Designed with reliable AC driver on board to enhance the service life
- Rapid heat-dissipating design to prolong lamp life and optimise lumen output
- Long service life of 100,000 hours @ 50°C (Ta)
- Compact and lightweight design
- Interchangeable module
- Safety, EMC and IEC compliance



Application





Decks, Marinas, Docks, Ports, Warehouses

Material

Marine grade aluminium alloy with powder coating, comes with 4mm tempered glass front cover

Weight

5.7Kg

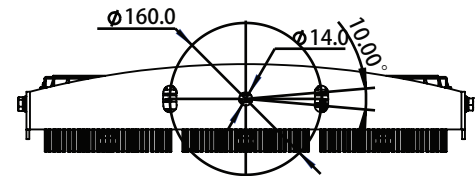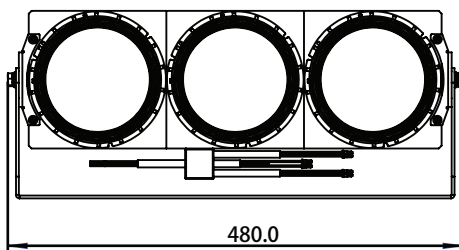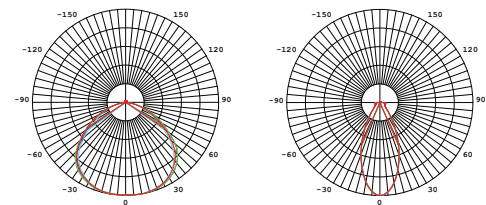

TECHNICAL SPECIFICATIONS IP 66

Ideal Replacement:



BH Code	Type	Main Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LAMFL35FA2OB	MFL3FA2	220V - 240V AC	168W	5000K	115°	-40°C ~ +50°C	16500lm
LAMFL35NA2OB	MFL3NA2	220V - 240V AC	168W	5000K	45°	-40°C ~ +50°C	16200lm
LAMFL35FA1OB	MFL3FA1	100V - 120V AC	168W	5000K	105°	-40°C ~ +50°C	13500lm
LAMFL35NA1OB	MFL3NA1	100V - 120V AC	168W	5000K	45°	-40°C ~ +50°C	13500lm
LAMFL35FDOB	MFL3FD	24V DC	168W	5000K	130°	-40°C ~ +50°C	14700lm
LAMFL35NDOB	MFL3ND	24V DC	168W	5000K	35°	-40°C ~ +50°C	13800lm

Also available in other CCT and beam angle upon request.



Due to our continuous development and product improvement policy, we reserve the rights to revise the specifications of all products without prior notice.