


# MODULAR LED FLOODLIGHT



## MFL 6 SERIES



### Key Features

- Triac dimming compatible
- Designed with reliable AC driver on board to enhance the service life
- Rapid heat-dissipating design to prolong lamp life and optimise lumen output
- Long service life of 100,000 hours @ 50°C (Ta)
- Compact and lightweight design
- Interchangeable module
- Safety, EMC and IEC compliance

### Application





Decks, Marinas, Docks, Ports, Warehouses

### Material

Marine grade aluminium alloy with powder coating, comes with 4mm tempered glass front cover

### Weight

10.14Kg

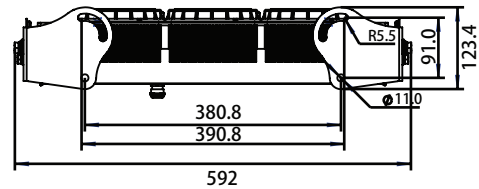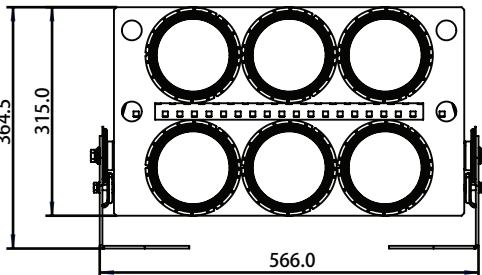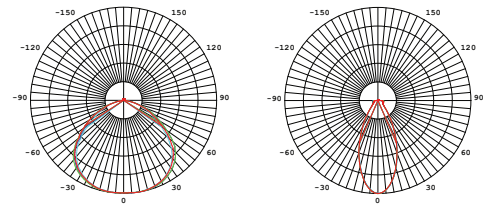

## TECHNICAL SPECIFICATIONS IP 66

Ideal Replacement:



BH Code	Type	Main Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LAMFL65FA2	MFL6FA2	220V - 240V AC	336W	5000K	115°	-20°C ~ +50°C	33000lm
LAMFL65NA2	MFL6NA2	220V - 240V AC	336W	5000K	45°	-20°C ~ +50°C	32400lm
LAMFL65FA1	MFL6FA1	100V - 120V AC	336W	5000K	105°	-20°C ~ +50°C	27000lm
LAMFL65FA1	MFL6FA1	100V - 120V AC	336W	5000K	45°	-20°C ~ +50°C	27000lm

Also available in other CCT and beam angle upon request.

