

LED SWING DOWNLIGHT



DL SERIES



Key Features

- Triac dimming compatible (AC voltage model only)
- Built-in with integrated driver for ease of installation
- Swingable to adjust light angle
- Vibration-resistant
- Energy savings of up to 86% compared to 50W halogen
- Superior heat sink designed to enhance the service life
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- Safety, EMC and IEC compliance

Application

Cabins, Passageways, Galleys, Meeting rooms

Material



Marine grade aluminium alloy with powder coating, comes with polycarbonate diffuser

Protection Class

IP44 in conjunction with ceiling

Weight

0.2Kg

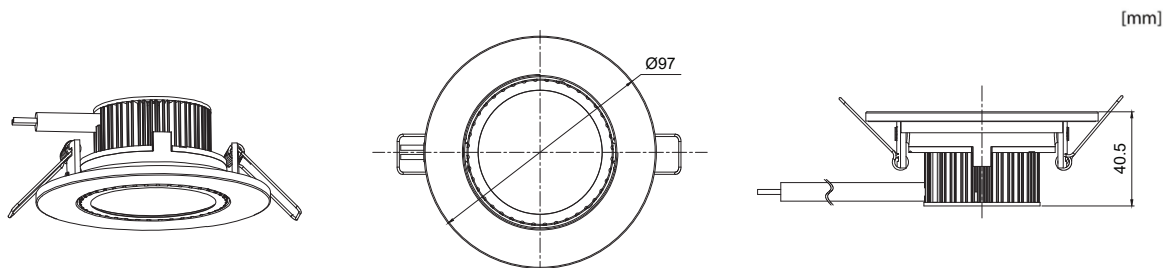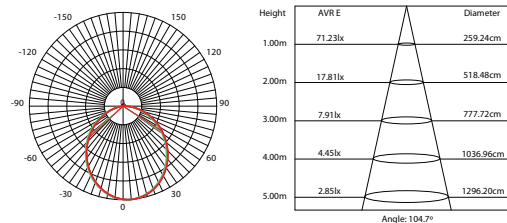

TECHNICAL SPECIFICATIONS



Ideal Replacement:



BH Code	Type	Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LADL74A2S	DL7A2S	220V - 240V AC	7W	4000K	105°	-20°C ~ +40°C	566lm
LADL74DS	DL7DS	24V DC	7W	4000K	105°	-20°C ~ +40°C	560lm

Also available in other CCT.

