


LED DOWNLIGHT



LDAF SERIES



Application

Cabins, Passageways, Galleys, Meeting rooms

Material

Marine grade aluminium alloy with powder coating, comes with polycarbonate diffuser


Protection Class

IP44 in conjunction with ceiling

Weight




DL12A2: 1.2Kg

DL15A2 / DL15A1 / DL15D: 1.3Kg

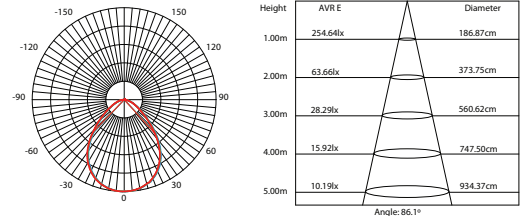

Key Features

- Triac dimming compatible (AC voltage models only)
- Designed with reliable AC driver on board to enhance the service life
- Vibration-resistant
- Energy savings of up to 60% compared to compact fluorescent system
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- Safety, EMC and IEC compliance



TECHNICAL SPECIFICATIONS



BH Code	Type	Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LDAF124KA22W	LDAF-12	220V - 240V AC	12W	4000K	85°	-20°C ~ +40°C	820lm
LDAF154KA22W	LDAF-15	220V - 240V AC	15W	4000K	85°	-20°C ~ +40°C	1050lm
LDAF154KA11W	LDAF-15	100V - 120V AC	15W	4000K	85°	-20°C ~ +40°C	1050lm
LDAF154KD24W	LDAF-15	24V DC	15W	4000K	85°	-20°C ~ +40°C	1050lm

Also available in other CCT.