

LED SWING DOWNLIGHT



LDAS SERIES



Key Features

- Triac dimming compatible (AC voltage model only)
- Built-in with integrated driver for ease of installation
- Swingable to adjust light angle
- Vibration-resistant
- Energy savings of up to 86% compared to 50W halogen
- Superior heat sink designed to enhance the service life
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- Safety, EMC and IEC compliance

Application

Cabins, Passageways, Galleys, Meeting rooms

Material



Marine grade aluminium alloy with powder coating, comes with polycarbonate diffuser

Protection Class

IP44 in conjunction with ceiling

Weight

0.2Kg

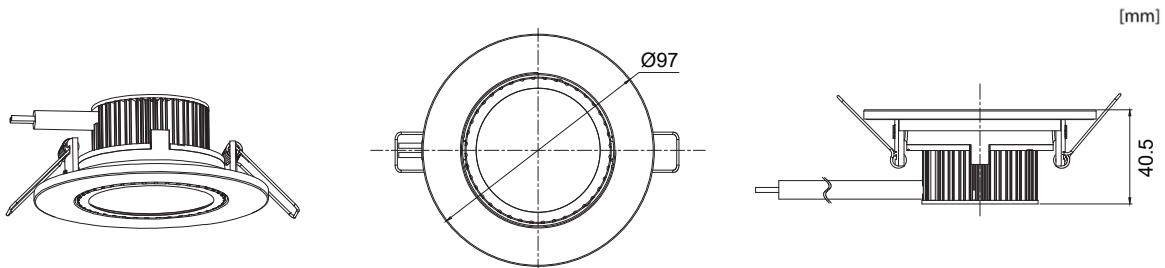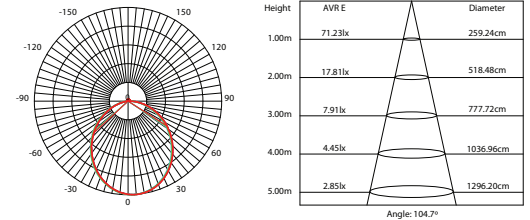

TECHNICAL SPECIFICATIONS



Ideal Replacement: 50W

BH Code	Type	Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LDAS074KA22W	LDAS-7	220V - 240V AC	7W	4000K	105°	-20°C ~ +40°C	566lm
LDAS074KD24W	LDAS-7	24V DC	7W	4000K	105°	-20°C ~ +40°C	560lm

Also available in other CCT.