



# LED DOWNLIGHT



## LDDF SERIES

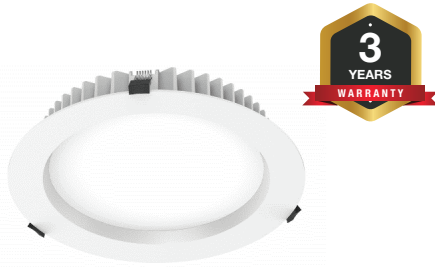

### Application

Cabins, Passageways, Galleys, Meeting rooms

### Material

Powder coated aluminium alloy body and heatsink with PMMA diffuser

### Protection Class


IP44

### Weight

0.9Kg

### Key Features

- Low profile suitable for shallow ceiling voids
- Triac dimming compatible
- 3 Selectable CCT: 3000K / 4000K / 6000K
- Energy savings of up to 52% compared to compact fluorescent system
- Vibration-resistant
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- CE Marking, EMC safety compliance

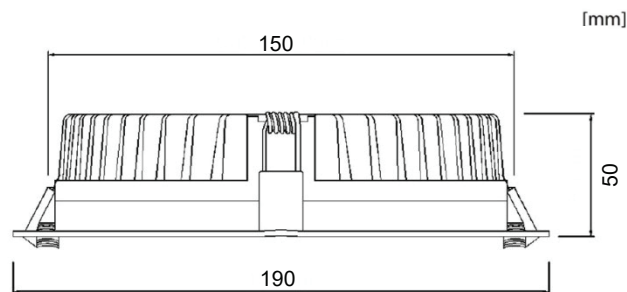

## TECHNICAL SPECIFICATIONS



Ideal Replacement: 42W CFL

BH Code	Type	Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LDDF20XKA22W	LDDF-20	220V - 240V AC	20W	3000K/4000K/ 6000K Selectable	90°	-20°C ~ +40°C	1700lm