


FIRE RATED LED DOWNLIGHT



LDDS SERIES

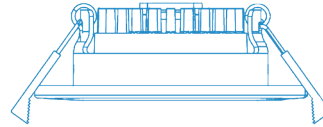

Key Features

- Fire-rated for 30, 60 and 90 minutes (BS 476-21:1987)
- Low profile suitable for shallow ceiling voids
- Triac dimming compatible
- 25° swingable to adjust light tilt angle
- 3 Selectable CCT: 3000K / 4000K / 6000K
- Default bezel in white. Optional bezel colours in chrome, nickel or black
- Energy savings of up to 55% compared to compact fluorescent system
- Vibration-resistant
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- CE Marking, EMC safety compliance

Application

Cabins, Galleys, Meeting rooms, Bathrooms

Material

Steel body with powder coating, aluminium heatsink, PMMA diffuser and polycarbonate bezel

Protection Class

IP65

Weight

0.3Kg


Optional Coloured Bezels



Chrome

Nickel

Black

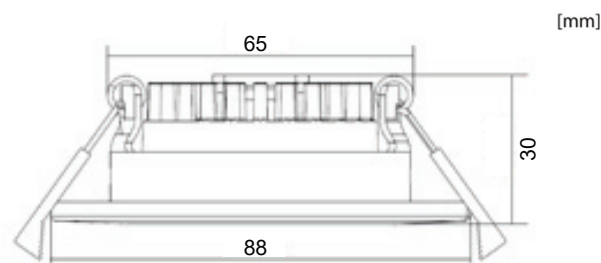

TECHNICAL SPECIFICATIONS



Ideal Replacement: 18W CFL

BH Code	Type	Voltage	Power	Bezel Colour	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LDDS08XKA22W	LDDS-8	220V - 240V AC	8W	White	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm
LDDS08XKA22C	LDDS-8	220V - 240V AC	8W	Chrome	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm
LDDS08XKA22N	LDDS-8	220V - 240V AC	8W	Nickel	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm
LDDS08XKA22B	LDDS-8	220V - 240V AC	8W	Black	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm